


Preset Ten Portable

model: PRE10P

technical data sheet

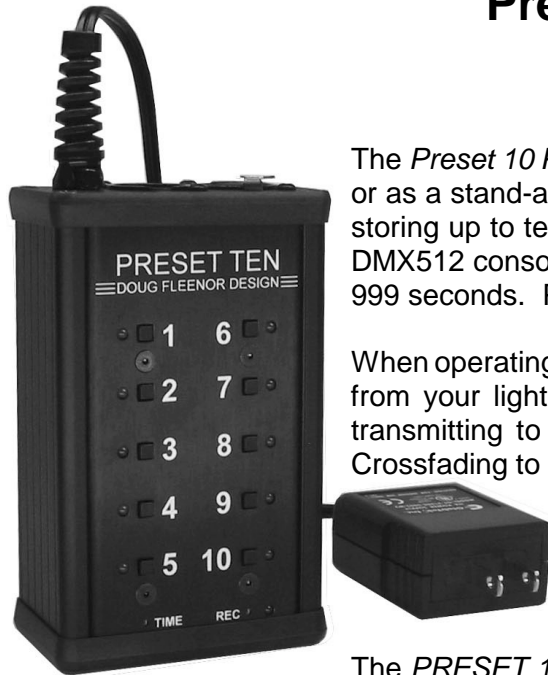

The *Preset 10 Portable* can act as a seamless backup for DMX512 lighting consoles or as a stand-alone DMX512 preset console. The *Preset 10 Portable* is capable of storing up to ten presets. These presets are recorded by capturing the output of a DMX512 console. Each preset can be assigned a unique crossfade time, from 0 to 999 seconds. Presets are recalled by pressing one of the buttons.

When operating as a backup device, *Preset 10 Portable* monitors the DMX512 output from your lighting console. If console output is lost, *Preset 10 Portable* begins transmitting to maintain the current look and alerts the user to the loss of DMX. Crossfading to any of the stored presets is then initiated by pressing a preset button

The *PRESET 10* also comes in a wall plate version for architectural applications.

SPECIFICATIONS:

Connectors:	Input:: 5 pin male, gold plated contacts (3 pin connectors optional) Output: 5 pin female, gold plated contacts (3 pin connectors optional)
Connector pin out:	1 - DMX512 common 2 - DMX512 data - 3 - DMX512 data + 4 - Passed Through 5 - Passed Through
Input/Output circuit:	ESD protected EIA-485 transceiver (LT1785)
Indicators:	Ten green preset indicator LEDs One red Signal / Record LED
User controls:	Ten preset push buttons One recessed record push button One recessed fade time push button
Power input:	Universal power supply 100 - 240VAC, 50/60 hertz, 5 watts
Color:	Black anodized with white nomenclature
Size and weight:	Chassis 5.3"l X 3.2"w X 1.8"h, 12 ounces Power supply 2.2"l X 1.9"w X 1.0"h, 5 ounces

MANUFACTURER MEMBER

ESTAENTERTAINMENT SERVICES &
TECHNOLOGY ASSOCIATION

Doug Fleenor Design, Inc.

396 Corbett Canyon Road
Arroyo Grande, CA 93420
(805) 481-9599 voice and FAX
(888) 4-DMX512 toll free (888) 436-9512
web site: <http://www.dfd.com>
e-mail: info@dfd.com