

SPK-2000

Powered Loudspeaker





The SPK-2000 is a powered loudspeaker accessory for the US-2002 User Station and the ES-4000A Expansion Station. It may be used on a desktop, or rack mounted with optional RTS AudioCom rackmount hardware. (Unit is supplied with rubber feet for desktop use.)

The SPK-2000 comes with a three (3ft) (0.9m) cord for connection to the US-2002 or ES-4000A speaker jack.

Features

- Powerful Speaker Output – Powerful speaker output for public address or stage announcement.
- Rack-Mountable – Rack-mountable with optional Telex Audiocom rackmount hardware. Occupies ½-wide rack space.
- Two Line-Level Speaker Inputs – Two line-level speaker inputs, with balance control to adjust the mix. Combine two channels of intercom audio. Or, connect the monaural mix output from an RTS Audiocom User Station, then connect a local program audio source, such as background music.
- Master Volume Control on Front Panel – Works with the Same Power Pack as US-2002 and ES-4000A.

Line Drawings

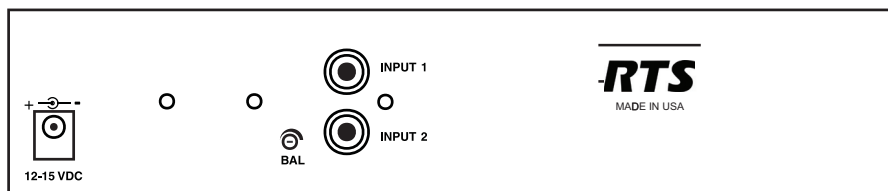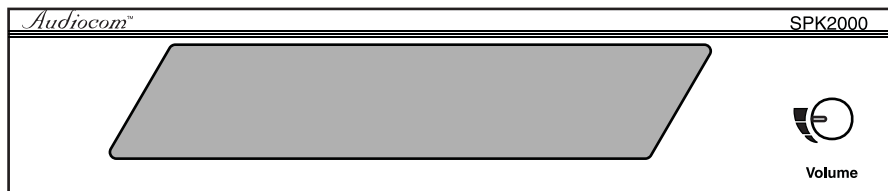

Specifications

General

Power Requirements: 15 VDC, ≥ 1.6 Amps
Frequency Response: 200 Hz to 8 kHz, +1/-3 dB
Input Impedance: 47K ohms, minimum
Input Level: 0.5 VRMS, nominal
Output Amplifier Power: 8 W maximum; 2 W continuous
Signal-to-Noise: >75dB (ref 2W into 4 Ω)

THD

Less than 0.5% at 2W

Balance Control: 12 dB maximum relative attenuation
Dimensions: 1.75" (44.5 mm) high,
8.25" (209.6 mm) wide,
5.15" (130.8 mm) deep
Environmental: 0°C to 50°C; 0% to 95% humidity, non-condensing

Order Information

- SPK-2000 • Self powered speaker, 5 watt output

For ordering information, contact your regional sales representative at:
<http://rtsintercoms.com/us/intercom/contact>

The specification information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.